
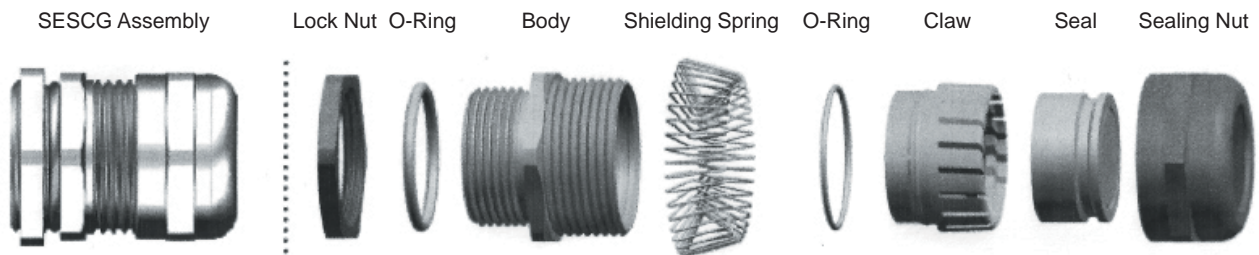


Waterproof EMC Cable Gland (SESCG Series) Spring Type

PRODUCT OVERVIEW:

Material: Nickel-Plated Brass
 Spring: Stainless Steel
 Thread Type: Metric
 Fixture Material: PA (Nylon)
 Seal: Silicone Rubber
 O-Ring: Silicone Rubber
 IP Rating: Waterproof (IP68)
 Product Features: RoHS and REACH Compliant
 Working Temperature: -40°C to +100°C

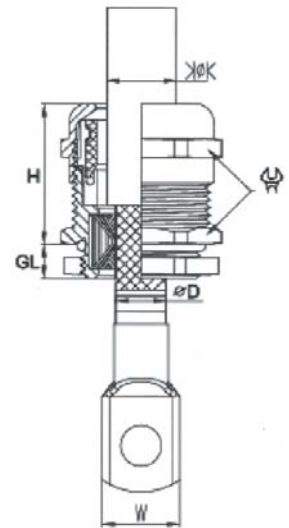

Part Number	Thread (mm)	Ø (mm)	ØD (mm)	H (mm)	GL for Normal Type (mm)	Wrench Size (mm)	GL for Long Type (mm)	W (mm)
SESCG-M1205-■	M12 x 1.5	2.0 - 5.0	3.4 - 4.5	19	6.5	14	10	6
SESCG-M1207-■	M12 x 1.5	3.0 - 6.5	3.5 - 4.5	19	6.5	14	10	6
SESCG-M1606-■	M16 x 1.5	2.0 - 6.0	3.5 - 5.5	21	6	17/19	10	8
SESCG-M1608-■	M16 x 1.5	4.0 - 8.0	3.5 - 5.5	21	6	17/19	10	8
SESCG-M1610-■	M16 x 1.5	5.0 - 10.0	3.5 - 5.5	22	6	20	10	9
SESCG-M2009-■	M20 x 1.5	5.0 - 9.0	6.0 - 11.0	23	6	22	10	12
SESCG-M2012-■	M20 x 1.5	6.0 - 12.0	6.0 - 11.0	23	6	22	10	12
SESCG-M2014-■	M20 x 1.5	10.0 - 14.0	6.0 - 11.0	24	6	24	10	13
SESCG-M2516-■	M25 x 1.5	9.0 - 16.0	9.0 - 14.0	29	7	30	12	17
SESCG-M2518-■	M25 x 1.5	13.0 - 18.0	9.0 - 14.0	29	7	30	12	17
SESCG-M3220-■	M32 x 1.5	13.0 - 20.0	16.0 - 19.0	31	8	40	12	23
SESCG-M3225-■	M32 x 1.5	18.0 - 25.0	16.0 - 19.0	31	8	40	12	23
SESCG-M4026-■	M40 x 1.5	20.0 - 26.0	19.5 - 24.0	37	8	50	15	30
SESCG-M4032-■	M40 x 1.5	22.0 - 32.0	19.5 - 24.0	37	8	50	15	30
SESCG-M5031-■	M50 x 1.5	25.0 - 31.0	27.5 - 33.0	37	9	57	15	37
SESCG-M5038-■	M50 x 1.5	32.0 - 38.0	27.5 - 33.0	37	9	57	15	37
SESCG-M6335-■	M63 x 1.5	29.0 - 35.0	31.0 - 35.0	38	10	64/68	15	44
SESCG-M6344-■	M63 x 1.5	37.0 - 44.0	31.0 - 35.0	38	10	64/68	15	44
SESCG-M7548-■	M75 x 1.5	41.0 - 48.0	46.0 - 53.0	40	15	81	20	-
SESCG-M7556-■	M75 x 1.5	48.0 - 56.0	46.0 - 53.0	40	15	81	20	-
SESCG-M8564-■	M85 x 2.0	54.0 - 64.0	60.0 - 67.0	42	15	95	20	-
SESCG-M8570-■	M85 x 2.0	62.0 - 70.0	60.0 - 67.0	42	15	95	20	-

Note: ■ - Empty means Normal Type and "L" means Long Type